

**Shenzhen Concox Information Technology
Co.,Ltd**

**GPS Tracker
Communication Protocol
(GT100/ET100)**

CONFIDENTIAL

Copyright

This document is copyrighted by Shenzhen Concox Information Technology Co.,Ltd.
Any unauthorized copy or transmission of the document partially or wholly shall be subject to prosecution.

CONTENT

1	COMMUNICATION PROTOCOL	2
2	TERMS AND DEFINITIONS.....	2
3	BASIC RULES	2
4	DATA PACKET FORMAT	4
	4.1 START BIT.....	5
	4.2 PACKET LENGTH.....	5
	4.3 PROTOCOL NUMBER	5
	4.4 INFORMATION CONTENTS.....	5
	4.5 INFORMATION SERIAL NUMBER	5
	4.6 ERROR CHECKING	6
	4.7 STOP BIT.....	6
5	DETAILS ABOUT DATA PACKET SENT BY SERVER TO TERMINAL.....	6
	5.1 LOGIN MESSAGE PACKET.....	6
	5.2 LOCATION DATA PACKET (COMBINED INFORMATION PACKAGE OF GPS AND LBS)	10
	5.3 ALARM PACKET (COMBINED INFORMATION PACKET OF GPS, LBS AND STATUS)	15
	5.4. HEARTBEAT PACKET (STATUS INFORMATION PACKET).....	24
6	DATA PACKET SENT FROM SERVER TO TERMINAL	27
	6.1 PACKET SENT BY SERVER	28
	6.2 PACKET REPLIED BY TERMINAL.....	29
	6.3 LOOKING UP LOCATION INFORMATION	31
	6.4 CUTTING OIL AND ELECTRICITY.....	31
	6.5 CONNECTING OIL AND ELECTRICITY.....	32
	6.6 ADDRESS QUERYING INFORMATION SENT BY THE SERVER.....	32
	6.7 GPS, PHONE NUMBER QUERYING ADDRESS INFORMATION PACKAGE (0X2A)	32
7	APPENDIX.....	38
	7.1 APPENDIX A: CODE FRAGMENT OF THE CRC-ITU LOOKUP TABLE ALGORITHM IMPLEMENTED BASED ON C LANGUAGE	38
	7.2 APPENDIX B: A FRAGMENT OF EXAMPLE OF DATA PACKET OF COMMUNICATION PROTOCOL 39	
	7.3 APPENDIX C: COMPLETE FORMAT OF THE INFORMATION PACKAGE	41

1 Communication Protocol

This document defines instructions about interface protocol on application layer of vehicles GPS tracker and location-based service platform. Related interface protocol only applies in the interaction between the platform and the position terminal.

2 Terms And Definitions


Terms, Abbreviation	Definition in English	Definition in Chinese
CMPP	China Mobile Peer to Peer	中国移动点对点协议
GPS	Global Positioning System	全球卫星定位系统
GSM	Global System for Mobile Communication	全球移动通信系统
GPRS	General Packet Radio Service	通用无线分组业务
TCP	Transport Control Protocol	传输控制协议
LBS	Location Based Services	辅助定位服务
IMEI	International Mobile Equipment Identity	国际移动设备识别码
MCC	Mobile Country Code	移动用户所属国家代号
MNC	Mobile Network Code	移动网号码
LAC	Location Area Code	位置区码
Cell ID	Cell Tower ID	移动基站
UDP	User Datagram Protocol	用户数据报协议
SOS	Save Our Ship/Save Our Souls	遇难求救信号
CRC	Cyclic Redundancy Check	循环冗余校验
NITZ	Network Identity and Time Zone,	时区
GIS	Geographic Information System	地理信息系统

3 Basic Rules

1. If a GPRS connection is established successfully, the terminal will send a first login message packet to the server and, within five seconds, if the terminal receives a data packet responded by the server, the connection is considered to be a normal connection. The terminal will begin to send location information (i.e., GPS, LBS information package). A status information package will be sent by the terminal after three minutes to regularly confirm the connection.
2. If the GPRS connection is established unsuccessfully, the terminal will not be able to send the first login message packet. The terminal will start schedule reboot in twenty minutes if the GPRS connection is failed three times. Within twenty minutes, if the terminal successfully connects to the server and receives the data packet from the server as the server's response to the login message packet sent by the terminal, the schedule reboot will be off and the terminal

will not be rebooted; otherwise, the terminal will be rebooted automatically in twenty minutes.

3. After receiving the login message packet, the server will return a response data packet. If the terminal doesn't receive packet from the server within five seconds after sending the login message packet or the status information package, the current connection is regarded as an abnormal connection. The terminal will start a retransmission function for GPS tracking data, which will cause the terminal to disconnect the current GPRS connection, rebuild a new GPRS connection and send a login message packet again.
4. If the connection is regarded to be abnormal, and the data packet as a response from the server is failed to be received three times after a connection is established and a login message packet or status information package is sent, the terminal will start schedule reboot and the scheduled time is ten minutes. Within ten minutes, if the terminal successfully connects to the server and receives the data packet responded by the server, the schedule reboot will be off and the terminal will not be rebooted; otherwise, the terminal will be rebooted automatically in ten minutes.
5. In case of the normal connection, the terminal will send a combined information package of GPS and LBS to the server after the GPS information is changed; and the server may set a default protocol for transmission by using commands.
6. To ensure the effectiveness of the connection, the terminal will send status information to the server at regular intervals, and the server will return response data packets to confirm the connection.
7. For the terminal which doesn't register an IMEI number, the server will reply the terminal with a login request response and heartbeat packet response, rather than directly disconnect the connection. (If the connection is directly disconnected or the server doesn't reply to the terminal, it will lead to a continuous reconnected by the terminal and the GPRS traffic will be consumed heavily.)
8. Data Flow Diagram

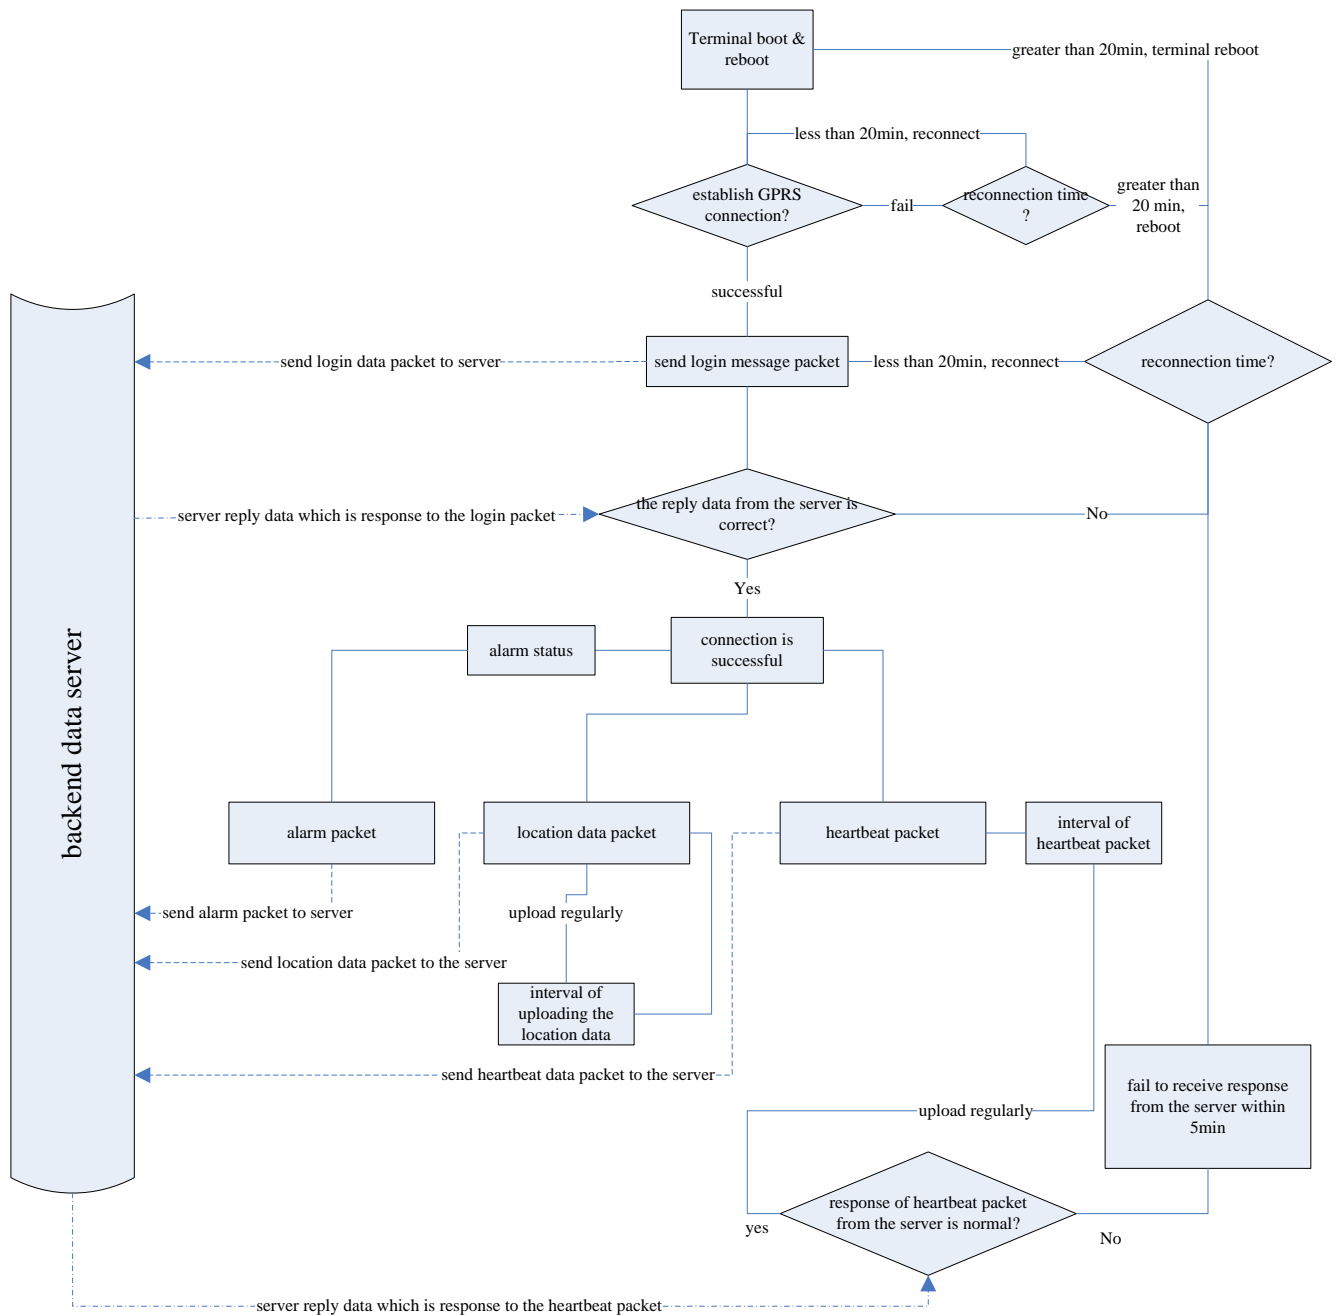

4 Data Packet Format

The communication is transferred asynchronously in bytes.

The total length of packets is (10+N) Bytes.

Format	Length(Byte)
Start Bit	2

Packet Length	1
Protocol Number	1
Information Content	N
Information Serial Number	2
Error Check	2
Stop Bit	2

4.1 Start Bit

Fixed value in HEX 0x78 0x78.

4.2 Packet Length

Length = Protocol Number + Information Content + Information Serial Number + Error Check, totally (5+N)Bytes, because the Information Content is in a variable length field.

4.3 Protocol Number

Type	Value
Login Message	0x01
Location Data (UTC)	0x22
Status information	0x13
String information	0x21
Alarm data	0x26
Time zone and time	0x27
GPS, query address information by phone number	0x2A
Command information sent by the server to the terminal	0x80

4.4 Information Contents

The specific contents are determined by the protocol numbers corresponding to different applications.

4.5 Information Serial Number

The serial number of the first GPRS data (including status packet and data packet such as GPS, LBS)

sent after booting is '1', and the serial number of data sent later at each time will be automatically added '1'.

4.6 Error Checking

A check code may be used by the terminal or the server to distinguish whether the received information is wrong or not. To prevent errors occur during data transmission, error checking is added to against data inappropriate operation, so as to increase the security and efficiency of the system. The check code is generated by the CRC-ITU checking method.

The check codes of data in the structure of the protocol, from the Packet Length to the Information Serial Number (including "Packet Length" and "Information Serial Number") , are the value of CRC-ITU.

CRC error occurs when the received information is calculated; the receiver will ignore and discard the data packet.

4.7 Stop Bit

Fixed value in HEX `0x0D 0x0A`.

5 Details about Data Packet Sent by Server to Terminal

The commonly used information packages sent by the terminal and those responded by the server will be interpreted separately.

5.1 Login Message Packet

5.1.1 Terminal Sending Data Packet to Server

The login message packet is used to be sent to the server with the terminal ID so as to confirm the established connection is normal or not.

	Description	Bits	Example
Login Message Packet(18 Bytes)	Start Bit	2	<u>0x78 0x78</u>
	Packet Length	1	<u>0x11</u>
	Protocol	1	<u>0x01</u>

CONFIDENTIAL

	Number		
	Terminal ID	8	<u>0x01 0x23 0x45 0x67 0x89 0x01 0x23 0x45</u>
	Type Identification Code	2	<u>0x20 0x10</u>
	Time Zone Language	2	<u>0x32 0x00</u>
	Information Serial Number	2	<u>0x00 0x01</u>
	Error Check	2	<u>0xA1 0x21</u>
	Stop Bit	2	<u>0x0D 0x0</u>

5.1.1.1 Start Bit

For details see Data Packet Format section 4.1.

5.1.1.2 Packet Length

For details see Data Packet Format section 4.2.

5.1.1.3 Protocol Number

For details see Data Packet Format section 4.3.

5.1.1.4 Terminal ID

The terminal ID applies IMEI number of 15 bits.

Example: if the IMEI is 123456789012345, then the terminal ID is 0x01 0x23 0x45 0x67 0x89 0x01 0x23 0x45.

5.1.1.5 Type Identification Code

Type identification code consumes two bytes, which shows the types of the terminals. The first three bits represent the type of the terminal, while the last bit represents the branch of the type.

Example: Version of ET100

Type identification code: 0x20 0x10 ET0100 (for electric bike) without tele-cut off function

Type identification code: 0x20 0x11 GT100 (for motorbike) with tele-cut off function

5.1.1.6 Time Zone Language

One and a half bits	15	Time zone value expands 100	
	14		
	13		
	12		
	11		
	10		
	9		
	8		
	7		
	6		
	5		
4			
Last nibble	3	GMT+	0
		GMT-	1
	2	No definition	
	1	Language choice bit	1
	0	Language choice bit	0

Example: Extended bit: 0x32 0x00 means GMT+8

Calculation method: $8 * 100 = 800$ converts to HEX: 0X0320

Extended bit: 0x4D 0xD8 means GMT-12:45

Calculation method: $12.45 * 100 = 1245$ converts to HEX: 0x04 0xDD

5.1.1.7 Information Serial Number

For details see Data Packet Format section 4.5.

5.1.1.8 Error Check

For details see Data Packet Format section 4.6.

5.1.1.9 Stop Bit

For details see Data Packet Format section 4.7.

5.1.2 Server Responds the Data Packet

	Description	Bits	Example
Login Message Packet (18 Byte)	Start Bit	2	<u>0x78 0x78</u>
	Packet Length	1	<u>0x05</u>
	Protocol Number	1	<u>0x01</u>
	Information Serial Number	2	<u>0x00 0x01</u>
	Error Check	2	<u>0xD9 0xDC</u>
	Stop Bit	2	<u>0x0D 0x0A</u>

The response packet from the server to the terminal: the protocol number in the response packet is identical to the protocol number in the data packet sent by the terminal.

5.1.2.1 Start Bit

For details see Data Packet Format section 4.1.

5.1.2.2 Packet Length

For details see Data Packet Format section 4.2.

5.1.2.3 Protocol Number

For details see Data Packet Format section 4.3.

5.1.2.4 Information Serial Number

For details see Data Packet Format section 4.5.

5.1.2.5 Error Check

For details see Data Packet Format section 4.6.

5.1.2.6 Stop Bit

For details see Data Packet Format section 4.7.

5.2 Location Data Packet (combined information package of GPS and LBS)

5.2.1 Terminal Sending Location Data Packet to Server

Format		Length(Byte)	Example	
Information Content	Start Bit	2	<u>0x78 0x78</u>	
	Packet Length	1	<u>0x22</u>	
	Protocol Number	1	<u>0x22</u>	
	GPS Information	Date Time	6	<u>0x0B 0x08 0x1D 0x11 0x2E 0x10</u>
		Quantity of GPS information satellites	1	<u>0xCF</u>
		Latitude	4	<u>0x02 0x7A 0xC7 0xEB</u>
		Longitude	4	<u>0x0C 0x46 0x58 0x49</u>
		Speed	1	<u>0x00</u>
		Course, Status	2	<u>0x14 0x8F</u>
	LBS Information	MCC	2	<u>0x01 0xCC</u>
		MNC	1	<u>0x00</u>
		LAC	2	<u>0x28 0x7D</u>
		Cell ID	3	<u>0x00 0x1F 0xB8</u>
	ACC	1	<u>0x01</u>	
	Data upload mode	1	<u>0x01</u>	
	GPS real time upload	1	<u>0x00</u>	
Serial Number	2	<u>0x00 0x03</u>		
Error Check	2	<u>0xFE 0x38</u>		
Stop Bit	2	<u>0x0D 0x0A</u>		

5.2.1.1 Start Bit

For details see Data Packet Format section 4.1.

5.2.1.2 Packet Length

For details see Data Packet Format section 4.2.

5.2.1.3 Protocol Number

For details see Data Packet Format section 4.3.

5.2.1.4 Date Time

Format	Length(Byte)	Example
Year	1	0x0A
Month	1	0x03
Day	1	0x17
Hour	1	0x0F
Minute	1	0x32
Second	1	0x17

Example: 2010-03-23 15:50:23

Calculated as follows: 10(Decimal)=0A(Hexadecimal)

3 (Decimal)=03(Hexadecimal)

23(Decimal)=17(Hexadecimal)

15(Decimal)=0F(Hexadecimal)

50(Decimal)=32(Hexadecimal)

23(Decimal)=17(Hexadecimal)

Then the value is: 0x0A 0x03 0x17 0x0F 0x32 0x17

5.2.1.5 Length of GPS information, quantity of positioning satellites

The field is 1 byte displayed by two hex digits, wherein the first one is for the length of GPS information and the second one for the number of the satellites join in positioning.

Example: if the value is 0xCB, it means the length of GPS information is 12 and the number of the positioning satellites is 11. (C = 12Bit Length , B = 11 satellites)

5.2.1.6 Latitude

4 bytes are consumed, defining the latitude value of location data. The range of the value is 0-162000000, indicating a range of 0 °-90 °. The conversion method is as follow:

Converting the value of latitude and longitude output by GPS module into a decimal based on minute; multiplying the converted decimal by 30000; and converting the multiplied result into hexadecimal

Example: $22^{\circ}32.7658' = (22 \times 60 + 32.7658) \times 30000 = 40582974$, then converted into a hexadecimal number

$40582974(\text{Decimal}) = 26B3F3E(\text{Hexadecimal})$

at last the value is 0x02 0x6B 0x3F 0x3E.

5.2.1.7 Longitude

4 bytes are consumed, defining the longitude value of location data. The range of the value is 0-324000000, indicating a range of 0 °-180 °.

The conversion method herein is same to the method mentioned in Latitude (see section 5.2.1.6).

5.2.1.8 Speed

1 byte is consumed, defining the running Speed of GPS. The value ranges from 0x00 to 0xFF indicating a range from 0 to 225km/h.

e.g. 0x00 represents 0 km/h.


0x10 represents 16km/h.

0xFF represents 255 km/h

5.2.1.9 Course & Status

2 bytes are consumed, defining the running direction of GPS. The value ranges from 0 ° to 360 ° measured clockwise from north of 0 °.

BYTE_1	Bit7	0
	Bit6	0
	Bit5	GPS real-time/differential positioning
	Bit4	GPS has been positioning or not
	Bit3	East Longitude, West Longitude
	Bit2	South Latitude, North Latitude
	Bit1	Course
Bit0		
BYTE_2	Bit7	

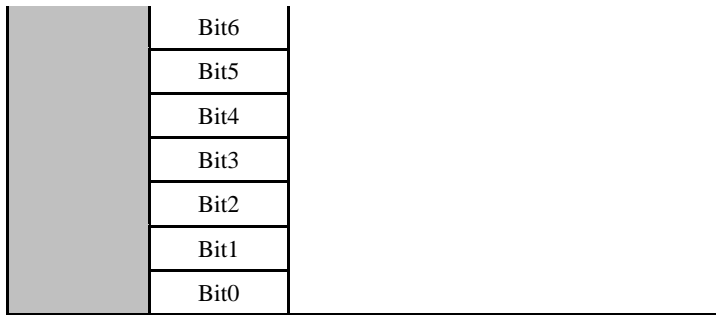

Note: The status information in the data packet is the status corresponding to the time bit recorded in the data packet.

For example: the value is 0x15 0x4C, the corresponding binary is 00010101 01001100,

BYTE_1 Bit7	0	
BYTE_1 Bit6	0	
BYTE_1 Bit5	0 (real time GPS)	
BYTE_1 Bit4	1 (GPS has been positioned)	
BYTE_1 Bit3	0 (East Longitude)	
BYTE_1 Bit2	1 (North Latitude)	
BYTE_1 Bit1	0	
BYTE_1 Bit0	1	
BYTE_2 Bit7	0	
BYTE_2 Bit6	1	
BYTE_2 Bit5	0	
BYTE_2 Bit4	0	
BYTE_2 Bit3	1	
BYTE_2 Bit2	1	
BYTE_2 Bit1	0	
BYTE_2 Bit0	0	

which means real-time GPS tracking is on. The location is at north latitude, east longitude and the course is 332 °.

5.2.1.10 MCC

The country code to which a mobile user belongs, i.e., Mobile Country Code(MCC).

Example: Chinese MCC is 460 in decimal or 0x01 0xCC in Hex (that is, a decimal value of 460 converting into a hexadecimal value, and 0 is added at the left side because the converted hexadecimal value is less than four digits).

Herein the range is 0x0000 ~ 0x03E7.

5.2.1.11 MNC

Mobile Network Code (MNC)

Example: Chinese MNC is 0x00.

5.2.1.12 LAC

Location Area Code (LAC) included in LAI consists of two bytes and is encoded in hexadecimal. The available range is 0x0001-0xFFFFE, and the code group 0x0000 and 0xFFFF cannot be used. (See GSM specification 03.03, 04.08 and 11.11).

5.2.1.13 Cell ID

The Value of Cell Tower ID (Cell ID) ranges from 0x000000 to 0xFFFFF.

5.2.1.14 ACC

The stature of ACC: 00 means low ACC; 01 means high ACC.

5.2.1.15 GPS Data Upload Mode

0x00 upload by intervals

0x01 upload by distance

0x02 upload for corner correction

0x03 upload by ACC stature change

0x04 upload last position before static

5.2.1.16 Information Serial Number

0x00 GPS real-time upload

0x01 GPS data re-upload

5.2.1.17 Error Check

For details see Data Packet Format section 4.6.

5.2.1.18 Stop Bit

For details see Data Packet Format section 4.7.

5.3 Alarm Packet (Combined information packet of GPS, LBS and Status)

5.3.1 Server Sending Alarm Data Packet to Server

Format		Length (Byte)	Example	
Information Content	Start Bit	2	0x78 0x78	
	Packet Length	1	0x0A	
	Protocol Number	1	0x26	
	Date Time	6	0x0B 0x08 0x1D 0x11 0x2E 0x10	
	GPS Information	Quantity of GPS information satellites	1	0xCF
		Latitude	4	0x02 0x7A 0xC7 0xEB
		Longitude	4	0x0C 0x46 0x58 0x49
		Speed	1	0x00
		Course, Status	2	0x14 0x8F
	LBS Information	LBS Length	1	0x08
		MCC	2	0x01 0xCC
		MNC	1	0x00
		LAC	2	0x28 0x7D
		Cell ID	3	0x00 0x1F 0xB8
	status Information	Terminal Information Content	1	0x40
		Voltage Level	1	0x06
		GSM Signal Strength	1	0x04
		Alarm/Language	2	0x00 0x02
Serial Number	2	0x00 0x1F		
Error Check	2	0xC4 0x39		
Stop Bit	2	0x0D 0x0A		

Alarm packet is consisted by adding status information to location packet, so does the encoding format of the protocol.

5.3.1.1 Start Bit

For details see Data Packet Format section 4.1.

5.3.1.2 Packet Length

For details see Data Packet Format section 4.2.

5.3.1.3 Protocol Number

For details see Data Packet Format section 4.3.

5.3.1.4 Date Time

For details see Location Data Packet Format section 5.2.1.4.

5.3.1.5 Length of GPS information, quantity of positioning satellites

For details see Location Data Packet Format section 5.2.1.5.

5.3.1.6 Latitude

For details see Location Data Packet Format section 5.2.1.6.

5.3.1.7 Longitude

For details see Location Data Packet Format section 5.2.1.7.

5.3.1.8 Speed

For details see Location Data Packet Format section 5.2.1.8.

5.3.1.9 Status and Course

For details see Location Data Packet Format section 5.2.1.9.

5.3.1.10 MCC

For details see Location Data Packet Format section 5.2.1.10.

5.3.1.11 MNC

For details see Location Data Packet Format section 5.2.1.11.

5.3.1.12 LAC

For details see Location Data Packet Format section 5.2.1.12.

5.3.1.13 Cell ID

For details see Location Data Packet Format section 5.2.1.13.

5.3.1.14 Terminal Information

One byte is consumed, defining various status information of the mobile phone.

Bit		Code Meaning
BYTE	Bit7	1: oil and electricity disconnected
		0: gas oil and electricity connected
	Bit6	1: GPS tracking is on
		0: GPS tracking is off
	Bit3~ Bit5	100: SOS
		011: Low Battery Alarm
		010: Power Cut Off Alarm
		001: Vibration Alarm
	Bit2	000: Normal
		1: Charge On
Bit1	0: Charge Off	
	1: ACC high	

		0: ACC Low
	Bit0	1: Defense Activated
		0: Defense Deactivated

Example: 0x44, corresponding binary value is 01000100, indicates that the status of the terminal is: oil and electricity connected, GPS tracking is on, no alarm, charge on, ACC is low, and defense deactivated.

5.3.1.15 Voltage Level

The range is 0~6 defining the voltage is from low to high.

0: No Power (shutdown)

1: Extremely Low Battery (not enough for calling or sending text messages, etc.)

2: Very Low Battery (Low Battery Alarm)

3: Low Battery (can be used normally)

4: Medium

5: High

6: Very High

Example: 0x02 indicates very low battery and a Low Battery Alarm is sending.

5.3.1.16 GSM Signal Strength Levels

0x00: no signal;

0x01: extremely weak signal;

0x02: very weak signal;

0x03: good signal;

0x04: strong signal.

Example: 0x03 indicates the GSM signal is good.

5.3.1.17 Alarm/Language

0x00 (former bit) 0x01 (latter bit)

former bit: terminal alarm status (suitable for alarm packet and electronic fence project)

latter bit: the current language used in the terminal

former bit	0x00: normal
	0x01: SOS
	0x02: Power Cut Alarm
	0x03: Vibration Alarm
	0x04: Fence In Alarm
	0x05: Fence Out Alarm

CONFIDENTIAL

	0x06: Over-speed Alarm
	0x09 Moving Alarm
latter bit	0x01: Chinese
	0x02: English

Examples:

No Alarm and Language is Chinese: 0x00 0x01

No Alarm and Language is English: 0x00 0x02

To increase the reliability of alarm information, labeling the alarm information repeatedly; in most cases, the alarm information keeps consistent with information of former terminal, while the inconsistencies are as follows:

- A. Low Battery Alarm occurred in the information of the terminal
- B. Fence in and out Alarm in the Alarm/Language information

5.3.1.18 Information Serial Number

For details see Data Packet Format section 4.5.

5.3.1.19 Error Check

For details see Data Packet Format section 4.6.

5.3.1.20 Stop Bit

For details see Data Packet Format section 4.7.

5.3.2 Server Responding Alarm Data Packet to Terminal (Terminal does not check enforcedly)

	Format	Length(Byte)	Example
Information Content	Start Bit	2	0x78 0x78
	Packet Length	1	0x0A
	Protocol Number	1	0x26
	Serial Number	2	0x00 0x01
	Error Check	2	0xD9 0xDC
	Stop Bit	2	0x0D 0x0A

Alarm packet is consisted by adding status information to location packet, so does the encoding format of the protocol.

5.3.2.1 Start Bit

For details see Data Packet Format section 4.1

5.3.2.2 Packet Length

For details see Data Packet Format section 4.2

5.3.2.3 Protocol Number

For details see Data Packet Format section 4.3

5.3.2.4 Serial Number

For details see Data Packet Format section 4.5

5.3.2.5 Error Check

For details see Data Packet Format section 4.6

5.3.2.6 Stop Bit

For details see Data Packet Format section 4.7

5.3.3 Server Responding alarm data address packet to Terminal

5.3.3.1 Response Package in Chinese

The response data packet in Chinese is as follow:

Command packet sent from the server to the	Start Bit		2
	Length of data bit		1
	Protocol Number		1
	Information	Length of Command	1

terminal (15+M+N Byte)	Content	Server Flag Bit		4
		Command Content	ALARMSMS	8
			&&	2
			Address Content	M
			&&	2
			Phone Number	21
			##	2
	Information Serial Number		2	
	Check Bit		2	
	Stop Bit		2	

The Protocol Number of request Chinese address response is 0X17.

Command Content: ADDRESS&&Address Content&&Phone Number(All is 0)## (ADDRESS, &&, ## are fixed strings)

Chinese address content is sent in UNICODE.

Example of Chinese address response information:

```

7878 // Start Bit
85 // Data Length
17 // Response Protocol Number
7E // Length of Command, i.e., length of the information of the transmitted
content
00000001 // Server Flag Bit
414C41524D534D53 // ALARMSMS
2626 //&& Separator
624059044F4D7F6E0028 // Chinese address is sent in UNICODE
004C004200530029003A
5E7F4E1C77015E7F5DDE
5E0282B190FD533AFF17
FF15FF144E6190530028
004E00320033002E0033
00390035002C00450031
00310032002E00390038
0038002996448FD1
2626 //&& Separator
00000000000000000000000000000000 // Phone Number
2323 //## terminator of content
0106 // Serial No.
3825 // Check Bit
0D0A // Stop Bit

```

5.3.3.2 Response package in English

Considering the address or other foreign address in English is generally longer than that in Chinese, one data bit is not enough, so the data bit is occupied in 2 bytes.

Note: only the length of data bit corresponding to the protocol number of response address information is changed into 2 bytes.

Command packet sent from the server to the terminal (15+M+N Byte)	Start Bit		2	
	Length of data bit		2	
	Protocol Number		1	
	Information Content	Length of Command		2
		Server Flag Bit		4
		Command Content	ALARMSMS	8
			&&	2
			Address Content	M
			&&	2
			Phone Number	21
			##	2
	Information Serial Number		2	
	Check Bit		2	
Stop Bit		2		

The Protocol Number of request English address response is 0X97.

Command Content: ADDRESS&&Address Content&&Phone Number(All is 0)##(ADDRESS, &&, ## are fixed strings)

Example of English address response information:

```

7878 // Start Bit
00D2 // Data Length
97 // Response Protocol Number
00CA // Length of Command, i.e., length of the information of the transmitted content
00000001 // Server Flag Bit
414C41524D534D53 // ALARMSMS
2626 //&& Separator
0053004F00530028004C // English address is sent in UNICODE
0029003A005300680069
006D0069006E00200046
0061006900720079006C
0061006E006400200057
00650073007400200052
0064002C004800750069

```

006300680065006E0067
002C004800750069007A
0068006F0075002C0047
00750061006E00670064
006F006E00670028004E
00320033002E00310031
0031002C004500310031
0034002E003400310031
0029004E006500610072
00620079
2626 //&& Separator
00000000000000000000000000000000 // Phone Number
2323 /// terminator of content
0007 //Serial No.
72b5 // Check Bit
0D0A // Stop Bit

5.4. Heartbeat Packet (status information packet)

Heartbeat packet is a data packet to maintain the connection between the terminal and the server.

5.4.1 Terminal Sending Heartbeat Packet to Server

Format		Length (Byte)	Example	
Information Content	Start Bit	2	0x78 0x78	
	Packet Length	1	0x0A	
	Protocol Number	1	0x13	
	Status Information	Terminal Information Content	1	0x40
		Voltage Level	1	0x06
		GSM Signal Strength	1	0x04
		Alarm/Language	2	0x00 0x01
	Serial Number	2	0x00 0x1F	
	Error Check	2	0xC4 0x39	
Stop Bit	2	0x0D 0x0A		

5.4.1.1 Start Bit

For details see Data Packet Format section 4.1.

5.4.1.2 Packet Length

For details see Data Packet Format section 4.2.

5.4.1.3 Protocol Number

For details see Data Packet Format section 4.3.

5.4.1.4 Terminal Information

1 byte is consumed defining for various status information of the mobile phone.

Bit		Code Meaning
BYTE	Bit7	1: oil and electricity disconnected
		0: gas oil and electricity

	Bit6	1: GPS tracking is on	
		0: GPS tracking is off	
	Bit3~ Bit5	100: SOS	
		011: Low Battery Alarm	
		010: Power Cut Alarm	
		001: Shock Alarm	
	Bit2	000: Normal	
		1: Charge On	
	Bit1	0: Charge Off	
		1: ACC high	
	Bit0	0: ACC Low	
		1: Defense Activated	
			0: Defense Deactivated

Example: 0x44, corresponding binary value is 01000100, indicates that the status of the terminal is: oil and electricity connected, GPS tracking is on, normal without any alarm, charge on, ACC is low, and defense deactivated.

5.4.1.5 Voltage Level

The range is 0~6 defining the voltage is from low to high.

0: No Power (shutdown)

1: Extremely Low Battery (not enough for calling or sending text messages, etc.)

2: Very Low Battery (Low Battery Alarm)

3: Low Battery (can be used normally)

4: Medium

5: High

6: Very High

Example: 0x02 indicates very low battery and a Low Battery Alarm is sending.

5.4.1.6 GSM Signal Strength Levels

0x00: no signal;

0x01: extremely weak signal;

0x02: very weak signal;

0x03: good signal;

0x04: strong signal.

Example: 0x03 indicates the GSM signal is good.

CONFIDENTIAL

5.4.1.7 Alarm/Language

0x00 (former bit) 0x01 (latter bit)

former bit: terminal alarm status (suitable for alarm packet and electronic fence project)

latter bit: the current language of the terminal

former bit	
latter bit	0x01: Chinese
	0x02: English

Examples:

No Alarm and Language is Chinese: 0x00 0x01

No Alarm and Language is English: 0x00 0x02

5.4.1.8 Information Serial Number

For details see Data Packet Format section 4.5.

5.4.1.9 Error Check

For details see Data Packet Format section 4.6.

5.4.1.10 Stop Bit

For details see Data Packet Format section 4.7.

5.4.2 Server Responds the Data Packet

	Description	Bits	Example
Login Message Packet (18 Byte)	Start Bit	2	<u>0x78 0x78</u>
	Packet Length	1	<u>0x05</u>
	Protocol Number	1	<u>0x13</u>
	Information Serial Number	2	<u>0x00 0x01</u>
	Error Check	2	<u>0xD9 0xDC</u>

	Stop Bit	2	<u>0x0D 0x0A</u>
--	----------	---	------------------

The response packet from the server to the terminal: the protocol number in the response packet is identical to the protocol number in the data packet sent by the terminal.

5.4.2.1 Start Bit

For details see Data Packet Format section 4.1.

5.4.2.2 Packet Length

For details see Data Packet Format section 4.2.

5.4.2.3 Protocol Number

For details see Data Packet Format section 4.3.

5.4.2.4 Information Serial Number

For details see Data Packet Format section 4.5.


5.4.2.5 Error Check

For details see Data Packet Format section 4.6.

5.4.2.6 Stop Bit

For details see Data Packet Format section 4.7.

6 Data Packet Sent From Server to Terminal

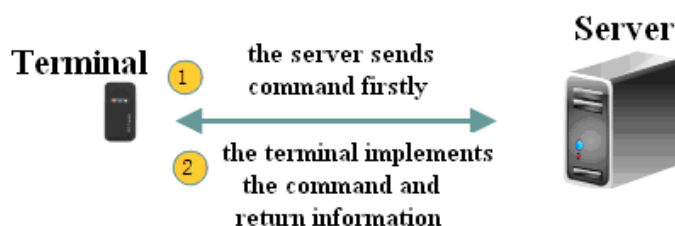

6.1 Packet Sent by Server

Format		Length (Byte)	Example
Start Bit		2	0x78 0x78
Packet length		1	0x0F
Protocol Number		1	0x80
Information Content	Length of Command	1	0x00 0xCA
	Server Flag Bit	4	0x00 0x00 0x00 0x01
	Command Content	M	
Information Serial Number		2	0x00 0x01
Error Check		2	0xD9 0xDC
Stop Bit		2	0x0D 0x0A

6.1.1 Start Bit

For details see Data Packet Format section 4.1.

6.1.2 Packet Length

For details see Data Packet Format section 4.2.

6.1.3 Protocol Number

The Protocol Number of terminal transmission is 0x80.

6.1.4 Length of Command

Server Flag Bit + Length of Command Content

Example: measured in bytes, 0x0A means the content of command occupied 10 bytes.

6.1.5 Server Flag Bit

It is reserved to the identification of the server. The binary data received by the terminal is returned without change.

6.1.6 Command Content

It is represented in ASCII of string, and the command content is compatible with text message command.

6.1.7 Language

Current language of the terminal.

Chinese: 0x00 0x01 English: 0x00 0x02

6.1.8 Information Serial Number

For details see Data Packet Format section 4.5.

6.1.9 Error Check

For details see Data Packet Format section 4.6.

6.1.10 Stop Bit

For details see Data Packet Format section 4.7.

6.2 Packet Replied by Terminal

Format		Length (Byte)	Example
Start Bit		2	0x79 0x79
Packet Length		2	0x09
Protocol Number		1	0x21
Information Content	Length of Command	1	
	Server Flag Bit	4	0x00 0x00 0x00 0x01
	Command Content	M	
Information Serial Number		2	0x00 0x01
Error Check		2	0xD9 0xDC
Stop Bit		2	0x0D 0x0A

6.2.1 Start Bit

Fixed value in HEX: 0x79 0x79

6.2.2 Packet Length

Consumed 2 bytes.

6.2.3 Protocol Number

Fixed value in HEX: 0x21

6.2.4 Server Flag Bit

It is reserved to the identification of the server. The binary data received by the terminal will be returned without change.

6.2.5 Command Content

0x01 ASC II

0x02 UTF16-BE

6.2.6 Content

Data needed to be sent.

6.2.7 Information Serial Number

For details see Data Packet Format section 4.5.

6.2.8 Error Check

For details see Data Packet Format section 4.6.

6.2.9 Stop Bit

For details see Data Packet Format section 4.7.

6.3 Looking Up Location Information

Function Description: the command to obtain the positioning information. A mobile phone user or a short message server may obtain the positioning information by this command.

In an example, the transmitting and returning strings are converted into ASCII to generate command contents.

<p>Sending by the server</p> <p>DWXX#</p>
<p>Returned by the terminal</p> <p>if successful, return</p> <p>DWXX=Lat:<North/South Latitude>,Lon:<East/West Longitude>,Course:<angle>,Speed:<speed>,DateTime:<time></p> <p>if failed, return</p> <p>DWXX=Command Error!</p> <p>if tracking unsuccessful, return</p> <p>DWXX=Lat:,Lon:, Course:,Speed:,DateTime:-:</p> <p>Example:</p> <p>DWXX=Lat:N23d5.1708m,Lon: E114d23.6212m,Course:120,Speed:53.02;DateTime:08-09-12 14:52:36</p> <p>Explain: which means: N23d5.1708m, E114d23.6212m, Course: 120, Speed: 53.02km/h, Date Time: 08-09-12 14:52:36.</p>

6.4 Cutting Oil and Electricity

Function Description: cutting off the vehicle oil-electric control circuit

In an example, the transmitting and returning strings are converted into ASCII to generate command contents.

<p>Sending by the server</p> <p>DYD#</p>
<p>Returned by the terminal</p> <p>if successful, return</p> <p>DYD=Success!</p> <p>if failed, return</p> <p>DYD=Unvalued Fix or DYD=Speed Limit, Speed 40km/h</p> <p>Explain: the oil and electricity are not allowed to be disconnect when the GPS tracking is off or the running speed is higher than 20KM/H.</p>

6.5 Connecting Oil and Electricity

Function Description: connecting the vehicle oil-electric control circuit

In an example, the transmitting and returning strings are converted into ASCII to generate command contents.

Sending by the server

HFYD#

Returned by the terminal

if successful, return

HFYD=Success!

if failed, return

HFYD=Fail!


6.6 Address Querying Information Sent by the Server

In an example, the transmitting and returning strings are converted into ASCII to generate command contents.

Sending by the server

ADDRESS, Address Content, Phone Number

Note: The address content in Chinese is sent in UNICODE.

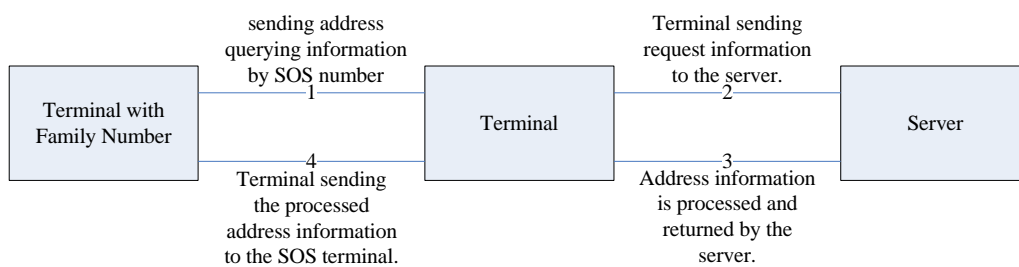

6.7 GPS, Phone Number Querying Address Information Package (0X2A)

CONFIDENTIAL

6.7.1 Information from Terminal to Server

The information is received by the terminal.

The format is basically same to the format mentioned as GPS information content, and the difference is that phone number for querying address is added here.

Format		Length (Byte)	Example	
Start Bit		2	0x78 0x78	
Packet Length		1	0x1F	
Protocol Number		1	0x2A	
Information Content	Date Time		0x0B 0x08 0x1D 0x11 0x2E 0x10	
	GPS Information	Length of GPS information, quantity of positioning satellites	1	0xCF
		Latitude	4	0x02 0x7A 0xC7 0xEB
		Longitude	4	0x0C 0x46 0x58 0x49
		Speed	1	0x00
		Course, Status	2	0x14 0x8F
	Phone Number		21	
	Language		2	0x00 0x01
Information Serial Number		2	0x00 0x03	
Error Check		2	0x80 0x81	
Stop Bit		2	0x0D 0x0A	

6.7.1.1 Start Bit

For details see Data Packet Format section 4.1.

6.7.1.2 Packet Length

For details see Data Packet Format section 4.2.

Example: measured in bytes, 0x2E means the content of command consumed 46 bytes.

6.7.1.3 Protocol Number

0x2A.

6.7.1.4 Date Time

For details see Location Data Packet Format section 5.2.1.4.

6.7.1.5 Length of GPS information, quantity of positioning satellites

For details see Location Data Packet Format section 5.2.1.5.

6.7.1.6 Latitude

For details see Location Data Packet Format section 5.2.1.6.

6.7.1.7 Longitude

For details see Location Data Packet Format section 5.2.1.7.

6.7.1.8 Speed

For details see Location Data Packet Format section 5.2.1.8.

6.7.1.9 Course

For details see Location Data Packet Format section 5.2.1.9.

6.7.1.10 Phone Number

The SOS phone number used for requesting address query, which is converted by ASCII and 0 is added at the right side if less than 21 bits.

6.7.1.11 Language

A bit indicates the current language used in the terminal.

Chinese: 0x00 0x01 English: 0x00 0x02

6.7.1.12 Information Serial Number

For details see Data Packet Format section 4.5.

6.7.1.13 Error Check

For details see Data Packet Format section 4.6.

6.7.1.14 Stop Bit

For details see Data Packet Format section 4.7.

6.7.2 Response of Server

The server replies Chinese address or English address based on the extended command, and the response data packet is inconsistent

6.7.2.1 Response package in Chinese

The response data packet in Chinese is as follow:

Format		Length (Byte)	Example	
Start Bit		2	0x78 0x78	
Packet Length		1	0x0F	
Protocol Number		1	0x17	
Information Content	Length of Command	1	0x7E	
	Server Flag Bit	4	0x00 0x00 0x00 0x01	
	Command Content	ADDRESS	7	0x41 0x44 0x44 0x52 0x45 0x53 0x53
		&&	2	0x26 0x26

	Address content	M	
	&&	2	0x26 0x26
	Phone number	21	
	##	2	0x23 0x23
Information Serial Number		2	0x00 0x01
Error Check		2	0xD9 0xDC
Stop Bit		2	0x0D 0x0A

The Protocol Number of request Chinese address response is 0X17.

Command Content: ADDRESS&&Address Content&&Phone Number## (ADDRESS, &&, ## are fixed strings)

Chinese address content is sent in UNICODE.

Example of Chinese address response information:

```

7878 //Start Bit
84 //Data Length
17 //Response Protocol Number
7E //Length of Command, i.e., length of the information of the transmitted content
00000001 //Server Flag Bit
41444452455353 //ADDRESS
2626 //&& Separator
624059044F4D7F6E0028 //Chinese address is sent in UNICODE
004C004200530029003A
5E7F4E1C77015E7F5DDE
5E0282B190FD533AFF17
FF15FF144E6190530028
004E00320033002E0033
00390035002C00450031
00310032002E00390038
0038002996448FD1
2626 //&&Separator
31333731303831393133350000000000000000 //Phone Number
2323 //## terminator of content
0106 //Serial No.
3825 //Check Bit
0D0A //Stop Bit

```

6.7.2.2 Response Package in English

Considering the address or other foreign address in English is generally longer than that in Chinese,

one data bit is not enough, so the data bit is occupied in 2 bytes.

Note: only the length of data bit corresponding to the protocol number of response address information is changed into two bytes.

Format		Length (Byte)	Example	
Start Bit		2	0x78 0x78	
Packet Length		2	0x0F	
Protocol Number		1	0x97	
Information Content	Length of Command	2	0x7E	
	Server Flag Bit	4	0x00 0x00 0x00 0x01	
	Command Content	ADDRESS	7	
		&&	2	0x26 0x26
		Address content	M	
		&&	2	0x26 0x26
		Phone number	21	
		##	2	0x23 0x23
Information Serial Number		2	0x00 0x01	
Error Check		2	0xD9 0xDC	
Stop Bit		2	0x0D 0x0A	

The Protocol Number of request English address response is 0X97.

Command Content: ADDRESS&&Address Content&&Phone Number##(ADDRESS, &&, ## are fixed strings)

Example of English address response information:

```

7878 //Start Bit
00D1 //Data Length
97 //Response Protocol Number
00CA //Length of Command, i.e., length of the information of the transmitted content
0000001 //Server Flag Bit
41444452455353 //ADDRESS
2626 //&& Separator
0053004F00530028004C //English address is sent in UNICODE
0029003A005300680069
006D0069006E00200046
0061006900720079006C
0061006E006400200057
00650073007400200052
0064002C004800750069
006300680065006E0067

```

```

002C004800750069007A
0068006F0075002C0047
00750061006E00670064
006F006E00670028004E
00320033002E00310031
0031002C004500310031
0034002E003400310031
0029004E006500610072
00620079
2626 //&& Separator
313235323031333739303737343035310000000000 //Phone Number
2323 //## terminator of content
0007 // Serial No.
72b5 //Check Bit
0D0A //Stop Bit

```

7 Appendix

7.1 Appendix A: Code Fragment of The CRC-ITU Lookup

Table Algorithm Implemented Based on C Language

Code fragment of the CRC-ITU lookup table algorithm implemented based on C language is as follow:

```

static const U16 crctab16[] =
{
    0X0000, 0X1189, 0X2312, 0X329B, 0X4624, 0X57AD, 0X6536, 0X74BF,
    0X8C48, 0X9DC1, 0XAF5A, 0XBED3, 0XCA6C, 0XDBE5, 0XE97E, 0XF8F7,
    0X1081, 0X0108, 0X3393, 0X221A, 0X56A5, 0X472C, 0X75B7, 0X643E,
    0X9CC9, 0X8D40, 0XBFDB, 0XAE52, 0XDAED, 0XCB64, 0XF9FF, 0XE876,
    0X2102, 0X308B, 0X0210, 0X1399, 0X6726, 0X76AF, 0X4434, 0X55BD,
    0XAD4A, 0XBCC3, 0X8E58, 0X9FD1, 0XEB6E, 0XFAE7, 0XC87C, 0XD9F5,
    0X3183, 0X200A, 0X1291, 0X0318, 0X77A7, 0X662E, 0X54B5, 0X453C,
    0XBDCB, 0XAC42, 0X9ED9, 0X8F50, 0XFBEF, 0XEA66, 0XD8FD, 0XC974,
    0X4204, 0X538D, 0X6116, 0X709F, 0X0420, 0X15A9, 0X2732, 0X36BB,
    0XCE4C, 0XD5C5, 0XED5E, 0XFC7D, 0X8868, 0X99E1, 0XAB7A, 0XBAF3,
    0X5285, 0X430C, 0X7197, 0X601E, 0X14A1, 0X0528, 0X37B3, 0X263A,
    0XD5CD, 0XCF44, 0XFD5F, 0XEC56, 0X98E9, 0X8960, 0XBBFB, 0XAA72,
    0X6306, 0X728F, 0X4014, 0X519D, 0X2522, 0X34AB, 0X0630, 0X17B9,
    0XEF4E, 0XFEC7, 0XCC5C, 0XDDD5, 0XA96A, 0XB8E3, 0X8A78, 0X9BF1,
    0X7387, 0X620E, 0X5095, 0X411C, 0X35A3, 0X242A, 0X16B1, 0X0738,
    0XFFCF, 0XEE46, 0XDCDD, 0XCD54, 0XB9EB, 0XA862, 0X9AF9, 0X8B70,
    0X8408, 0X9581, 0XA71A, 0XB693, 0XC22C, 0XD3A5, 0XE13E, 0XF0B7,
    0X0840, 0X19C9, 0X2B52, 0X3ADB, 0X4E64, 0X5FED, 0X6D76, 0X7CFE,
    0X9489, 0X8500, 0XB79B, 0XA612, 0XD2AD, 0XC324, 0XF1BF, 0XE036,

```

```

0X18C1, 0X0948, 0X3BD3, 0X2A5A, 0X5EE5, 0X4F6C, 0X7DF7, 0X6C7E,
0XA50A, 0XB483, 0X8618, 0X9791, 0XE32E, 0XF2A7, 0XC03C, 0XD1B5,
0X2942, 0X38CB, 0X0A50, 0X1BD9, 0X6F66, 0X7EEF, 0X4C74, 0X5DFD,
0XB58B, 0XA402, 0X9699, 0X8710, 0XF3AF, 0XE226, 0XD0BD, 0XC134,
0X39C3, 0X284A, 0X1AD1, 0X0B58, 0X7FE7, 0X6E6E, 0X5CF5, 0X4D7C,
0XC60C, 0XD785, 0XE51E, 0XF497, 0X8028, 0X91A1, 0XA33A, 0XB2B3,
0X4A44, 0X5BCD, 0X6956, 0X78DF, 0X0C60, 0X1DE9, 0X2F72, 0X3EFB,
0XD68D, 0XC704, 0XF59F, 0XE416, 0X90A9, 0X8120, 0XB3BB, 0XA232,
0X5AC5, 0X4B4C, 0X79D7, 0X685E, 0X1CE1, 0X0D68, 0X3FF3, 0X2E7A,
0XE70E, 0XF687, 0XC41C, 0XD595, 0XA12A, 0XB0A3, 0X8238, 0X93B1,
0X6B46, 0X7ACF, 0X4854, 0X59DD, 0X2D62, 0X3CEB, 0X0E70, 0X1FF9,
0XF78F, 0XE606, 0XD49D, 0XC514, 0XB1AB, 0XA022, 0X92B9, 0X8330,
0X7BC7, 0X6A4E, 0X58D5, 0X495C, 0X3DE3, 0X2C6A, 0X1EF1, 0X0F78,
};

// calculate the 16-bit CRC of data with predetermined length.
U16 GetCrc16(const U8* pData, int nLength)
{
    U16 fcs = 0xffff;           // initialization
    while(nLength>0){
        fcs = (fcs >> 8) ^ crctab16[(fcs ^ *pData) & 0xff];
        nLength--;
        pData++;
    }
    return ~fcs;               // negated
}

```

7.2 Appendix B: A Fragment of Example of Data Packet of Communication Protocol

The following data displayed in hexadecimal are intercepted from the communication between a terminal and a server, wherein transmission means sending by the terminal and reception means returned from the server:

Login packet:

transmission: 78 78 0D 01 03 53 41 35 32 15 03 62 00 02 2D 06 0D 0A

reception: 78 78 05 01 00 02 EB 47 0D 0A

GPS data packet (06 adopts combined information package of GPS and LBS):

transmission: 78 78 22 22 0E 06 09 17 25 39 C8 02 6E DB 98 0C 39 11 20 0C D4 C5 01 CC 00 28
70 00 0F 3D 01 00 00 00 10 3F 7B 0D 0A

Status packet:

transmission: 78 78 0A 13 44 01 04 00 01 00 05 08 45 0D 0A

reception: 78 78 05 13 00 05 AF D5 0D 0A

disconnect oil and electricity online:

reception: 78 78 12 80 0C 00 11 96 42 52 45 4C 41 59 2C 31 23 00 00 BF 4B 0D 0A

transmission: 79 79 00 2B 21 00 11 96 42 01 43 75 74 20 6F 66 66 20 74 68 65 20 66 75 65 6C 20 73 75
70 70 6C 79 3A 20 53 75 63 63 65 73 73 21 00 05 D5 E9 0D 0A

CONFIDENTIAL

the server sending RELAY,1#

reply: Cut off the fuel supply: Success!

Command sent during disconnection of oil and electricity:

reception: 78 78 12 80 0C 00 11 96 43 52 45 4C 41 59 2C 31 23 00 00 EA DA 0D 0A

transmission: 79 79 00 52 21 00 11 96 43 01 41 6C 72 65 61 64 79 20 69 6E 20 74 68 65 20 73 74 61 74 65 20 6F 66 20 66 75 65 6C 20 73 75 70 70 6C 79 20 63 75 74 20 6F 66 66 2C 20 74 68 65 20 63 6F 6D 6D 61 6E 64 20 69 73 20 6E 6F 74 20 72 75 6E 6E 69 6E 67 21 00 06 A3 D8 0D 0A

the server sending RELAY,1#

reply: Already in the state of fuel supply cut off, the command is not running!

Connect oil and electricity online:

reception: 78 78 12 80 0C 00 11 96 44 52 45 4C 41 59 2C 30 23 00 00 56 87 0D 0A

transmission: 79 79 00 27 21 00 11 96 44 01 52 65 73 74 6F 72 65 20 66 75 65 6C 20 73 75 70 70 6C 79 3A 20 53 75 63 63 65 73 73 21 00 07 75 AE 0D 0A

the server sending: RELAY,0#

reply: Restore fuel supply: Success!

Command sent during connection of oil and electricity:

reception: 78 78 12 80 0C 00 11 96 45 52 45 4C 41 59 2C 30 23 00 00 03 16 0D 0A

transmission: 79 79 00 54 21 00 11 96 45 01 41 6C 72 65 61 64 79 20 69 6E 20 74 68 65 20 73 74 61 74 65 20 6F 66 20 66 75 65 6C 20 73 75 70 70 6C 79 20 74 6F 20 72 65 73 75 6D 65 2C 20 74 68 65 20 63 6F 6D 6D 61 6E 64 20 69 73 20 6E 6F 74 20 72 75 6E 6E 69 6E 67 21 00 08 A0 A1 0D 0A

the server sending: RELAY,0#

reply: Already in the state of fuel supply to resume, the command is not running!

Querying address information online:

Command sent during GPS located:

reception: 78 78 10 80 0A 00 11 96 56 57 48 45 52 45 23 00 00 65 A1 0D 0A

transmission: 79 79 00 74 21 00 11 96 56 01 43 75 72 72 65 6E 74 20 70 6F 73 69 74 69 6F 6E 21 20 4C 61 74 3A 4E 32 32 2E 35 37 37 31 38 37 2C 4C 6F 6E 3A 45 31 31 33 2E 39 31 36 37 33 33 2C 43 6F 75 72 73 65 3A 30 2E 30 30 2C 53 70 65 65 64 3A 30 2E 30 30 4B 6D 2F 68 2C 44 61 74 65 54 69 6D 65 3A 32 30 31 34 2D 30 39 2D 30 34 20 30 39 3A 31 31 3A 33 30 00 21 23 17 0D 0A

Content sent by the terminal:Current position!

Lat:N22.577187,Lon:E113.916733,Course:338.34,Speed:0.00Km/h,Date Time:2014-09-04 09:11:30

Command sent during GPS unlocated:

reception: 78 78 10 80 0A 00 11 96 46 57 48 45 52 45 23 00 00 9A 35 0D 0A

transmission: 79 79 00 6F 21 00 11 96 46 01 4C 61 73 74 20 70 6F 73 69 74 69 6F 6E 21 20 4C 61 74 3A 4E 32 32 2E 35 37 37 31 36 38 2C 4C 6F 6E 3A 45 31 31 33 2E 39 31 36 37 37 39 2C 43 6F 75 72 73 65 3A 30 2E 30 30 2C 53 70 65 65 64 3A 30 2E 30 30 4B 6D 2F 68 2C 44 61 74 65 54 69 6D 65 3A 32 30 31 34 2D 30 36 2D 32 37 20 30 33 3A 32 30 3A 35 33 00 09 D8 D2 0D 0A

Content sent by the terminal>Last position!

Lat:N22.577168,Lon:E113.916779,Course:0.00Km/h,Date Time :2014-06-27 03:20:53

Process of Alarm packet:

2	1	1	6	2	1	2	3	N	2	2	2
---	---	---	---	---	---	---	---	---	---	---	---

LBS complete information package (42+N Byte)																										
Start Bit	Packet length	Protocol Number	Information Content																			Reserved extended bit	Information serial number	check bit	stop bit	
			Date Time	LBS Information																						
				MCC	MNC	LAC	MCI	MCISS	NIS1	NIS2	NIS3	NIS4	NIS5	NIS6	NIS7	NIS8	NIS9	NIS10	NIS11	NIS12	NIS13					NIS14
2	1	1	6	2	1	2	2	1	2	1	2	1	2	1	2	1	2	1	2	1	2	1	N	2	2	2

GPS、LBS information package (34+M+N Byte)																					
Start Bit	Packet length	Protocol Number	Information Content															Reserved extended bit	Information serial number	check bit	stop bit
			Date Time	GPS Information							LBS Information										
				Length of GPS information, quantity of positioning satellites	Latitude	Longitude	Speed	Course, Status	Reserved extended bit	MCC	MNC	LAC	Cell ID	Reserved and extended bit							
2	1	1	6	1	4	4	1	2	M	2	1	2	3	M	2	2	2				

Status Packet(13+N Byte)										
Start Bit	Packet Length	Protocol Number	Information Content					Information Serial Number	Check Bit	Stop Bit
			Terminal Information Content	Voltage Level	GSM Signal Strength Level	Reserved and Extended Bit (language)				
2	1	1	1	1	1	2	2	2	2	

SNR information of satellite (11+M+N Byte)											
Start Bit	Packet Length	Protocol Number	Information Content						Information Serial Number	Check Bit	Stop Bit
			Quantity of positioning satellites	SNR of Satellite				Reserved and Extended Bit			
				1	2	3				
2	1	1	1	M	N	2	2	2			

terminal responds to the command sent by server (15+M+N Byte)											
Start Bit	Packet Length	Protocol Number	String Content					Reserved and Extended Bit (language)	Information Serial Number	Check Bit	Stop Bit
			Length of Command	Server Flag Bit	Command Content						
2	1	1	1	4	M	2	2	2			

GPS, LBS, Status Information Package (40+M+N+L Byte)																						
Start Bit	Packet Length	Protocol Number	Information Content															Reserved and Extended Bit (language)	Information Serial Number	Check Bit	Stop Bit	
			Date Time	GPS Information							LBS Information						Status Information					
				Length of GPS information, quantity of positioning satellites	Latitude	Longitude	Speed	Course, Status	Reserved and Extended Bit	LBS Length	MCC	MNC	LAC	Cell ID	Reserved and Extended Bit	Terminal Information Content	Voltage Level					GSM Signal Strength Level
2	1	1	6	1	4	4	1	2	M	1	2	1	2	3	N	1	1	1	2	2	2	2

7.3.2 Data Packet Sent by Server to Terminal

Response of Server after receiving Status Packet from Terminal (10 Bytes)					
Start Bit	Packet Length	Protocol Number	Information Serial Number	Check Bit	Stop Bit
2	1	1	2	2	2

Command Packet Sent by Server to Terminal (15+M+N Byte)									
Start Bit	Packet Length	Protocol Number	Information Content				Information Serial Number	Check Bit	Stop Bit
			Length of Command	Server Flag Bit	Command Content	Reserved extended bit			
2	1	1	1	4	M	N	2	2	2

ShenZhen Concox Information Technology CO.,Ltd

Tel: +86 755 2912 1200

Fax: +86 755 2912 1290

E-mail: Jason@concox.cn.

Add: 4/F, Building B, Gaoxinqi Industrial Park,
Liuxian 1st Road, No.67 Bao'an District, Shenzhen